


**Drying Log by Visit - Visit 4**

**Air Monitoring**

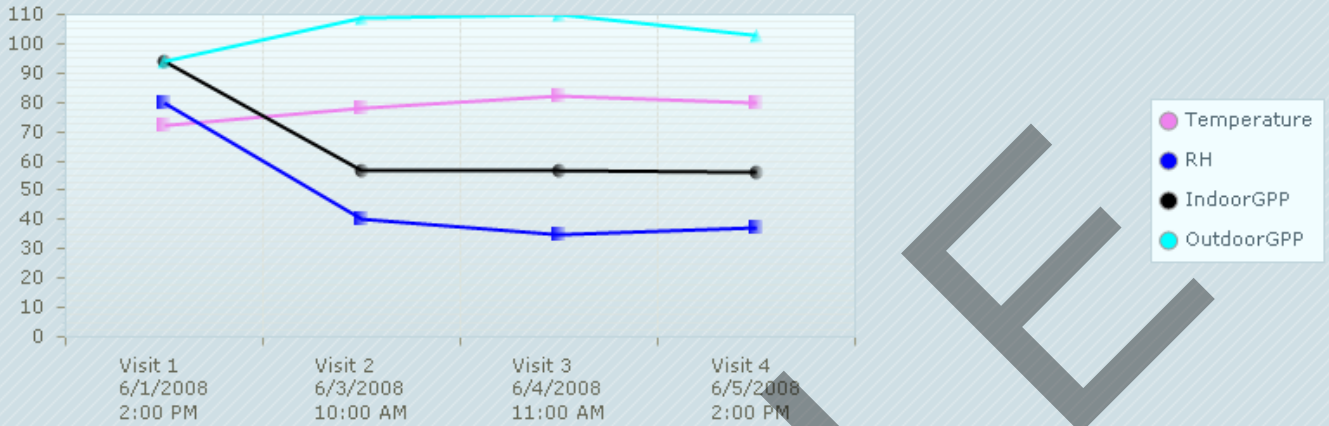


- 1 Indoor air temperature is ideal to promote substrate drying.
- 2 Based on relative humidity (RH%) and specific humidity (GPP), ambient indoor air conditions are ideal to promote substrate drying.

**Equipment Usage**


- 3 Project is satisfactorily completed and all equipment should be removed.

**Substrate Moisture Content**

**Floor Moisture Content**

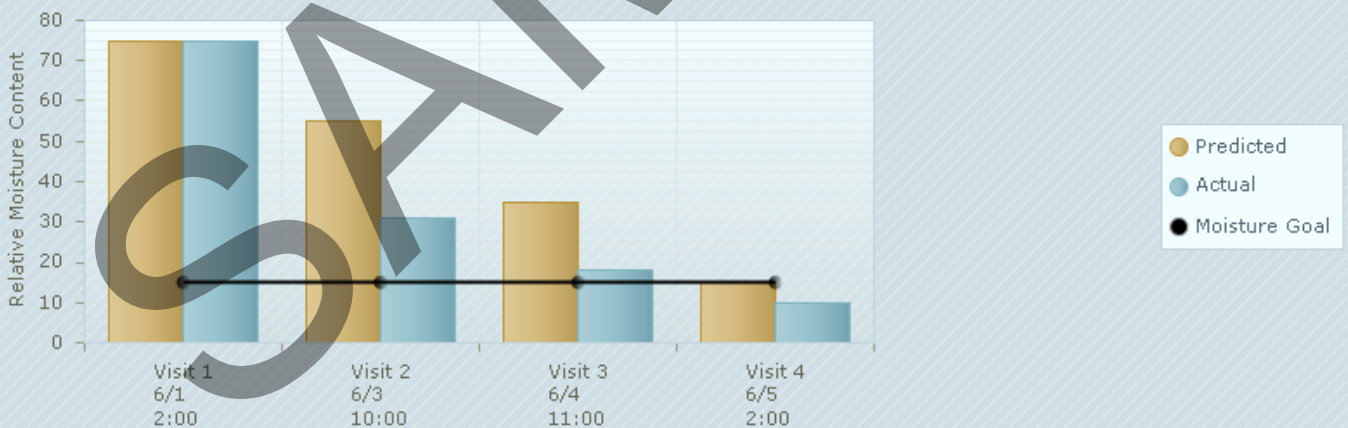

**Floor - Estimated 24-h moisture content decline 7.1**

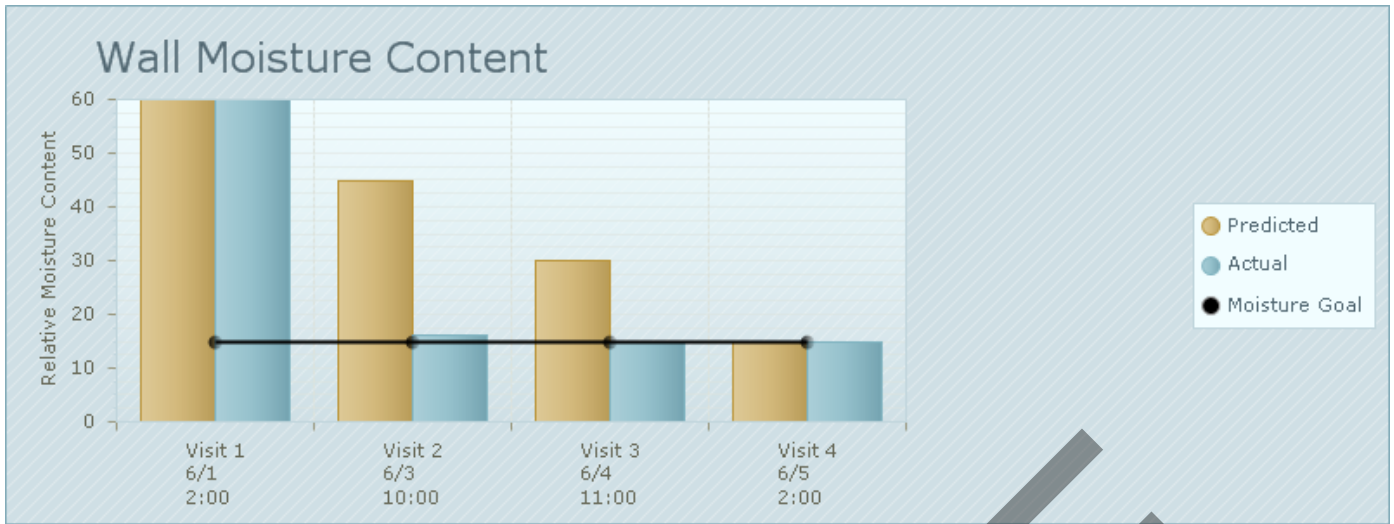

**Wall - Estimated 24-h moisture content decline Missing Value**

4 Based on all individual room substrate moisture content measurements, the project is satisfactorily completed.

**Contractor Notes**

No records to display

**Contractor**

**Date Created**

**Note:** Any user of the information contained in this Report uses it at their own risk. There is no guarantee that the information contained herein is free from error. The information is calculated based on supplied data. To the extent that the such data is inaccurate, or there are changes in the environmental conditions that are not included in the input data, e.g. changes in air temperature or relative humidity levels, the report will be inaccurate.

SAMPLE